


Biegeradius min. dauernd
Min. bend radius for flexing 48mm



Biegeradius min. einmalig
Min. bend radius for rigid configuration 18mm

Schleppkettenradius min.
Min. drag chain radius --

max. Kabellänge (L): siehe Techn. Daten des Gerätetyps
For max. cable length (L): See Specifications of the encoder model

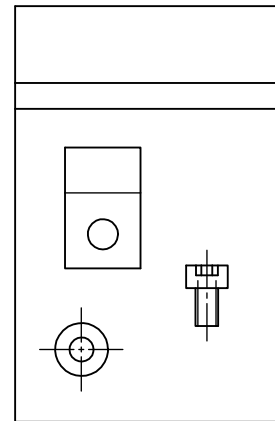

Toleranztabelle	
L	T
≤ 250mm	± 5mm
< 1000mm	+ 10mm
≤ 3000mm	+ 30mm
> 3000mm	+ 1%

			IDnumber:
			Change No. C132374-05 Phase: Serie
	Original drawing Scale	Format	Tolerierung nach DIN ISO 8015 Tolerances as per DIN ISO 8015
Dimensions in mm	1:1	A4	Allgemeintoleranzen ISO 2768-mH ±6mm: +- 0,2 General tolerances ISO 2768-mH ±6mm: +- 0,2
AGK 3VB015 --> 1H (6,0mm)		Anschlussmaße	

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. (ISO 16016)

HEIDENHAIN
DR. JOHANNES HEIDENHAIN GmbH
83301 Traunreut, Germany

Version	Revision	Sheet	
D 1231810 - 01 - A - 04			1 of 1
Document number			

886 200 A4